


Softline 36 Drainage Caps

Product information

Drainage caps for uPVC window and door systems.

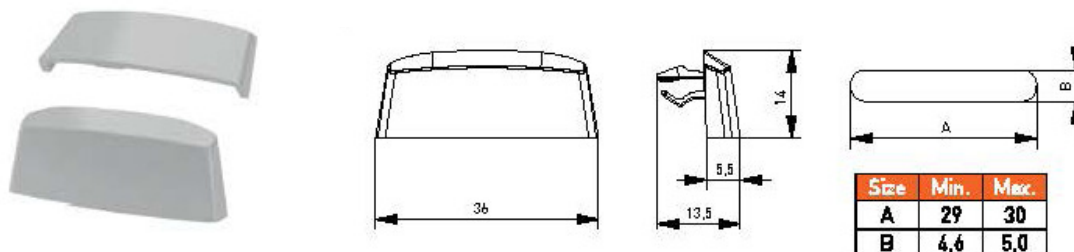


| Product code | Description | Colour | Packaging unit |
|--------------|---------------|----------------------|----------------|
| 31390160100 | Drainage caps | 9016 white | 1000 |
| 31380190100 | Drainage caps | 8019 | 1000 |
| 31380030100 | Drainage caps | 8003 | 1000 |
| 31370160100 | Drainage caps | 7016 anthracite grey | 1000 |
| 31390050100 | Drainage caps | 9005 black | 1000 |
| 31370010100 | Drainage caps | 7001 | 100 |
| 31380770100 | Drainage caps | 8077 brown | 100 |
| 31390010100 | Drainage caps | 9001 cream | 100 |

Note: Softline 46mm available on request.

Fixing Wedges

Product information

Plastic wedges for adjustment and installation of windows and doors.

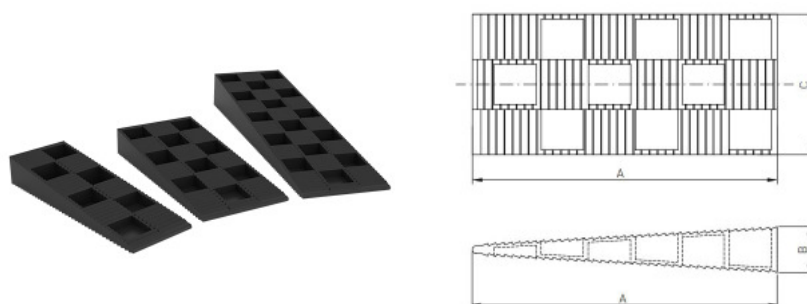


| Product code | Description | Material | Packaging unit |
|--------------|----------------------|----------|----------------|
| 72714290000 | Fixing wedge - small | plastic | 500 |
| 72720450000 | Fixing wedge - large | plastic | 200 |

KONIG Touch-up Pens

Product information

Coloured touch-up pens for uPVC window profiles. (Top coat pen for colouring miter grooves on foil-laminated uPVC window profiles and doors. Recommended for indoor and outdoor use. Acrylic topcoat applies easily and touch dry in 5-10 mins, with 24 hrs curing.)

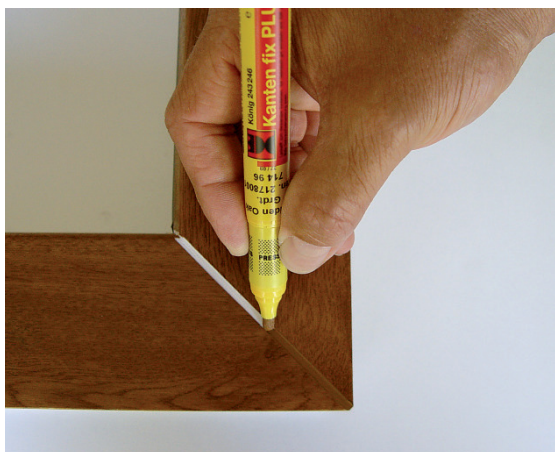

| Product code | Description | Colour | Packaging unit |
|------------------|-----------------------|-----------------|----------------|
| 243546005018-164 | Coloured touch up pen | turner oak | 1 |
| 243556005118-164 | Coloured touch up pen | sheffield oak | 1 |
| 243546017117 | Coloured touch up pen | jet black | 1 |
| 243546070509 | Coloured touch up pen | black/brown | 1 |
| 243546070709 | Coloured touch up pen | anthracite plus | 1 |
| 243546075412-234 | Coloured touch up pen | 9016 white | 1 |
| 243546093494-234 | Coloured touch up pen | anthracite grey | 1 |
| 243546111707-234 | Coloured touch up pen | signal grey | 1 |
| 243546147907-164 | Coloured touch up pen | ceylon | 1 |
| 243546157110-234 | Coloured touch up pen | walnut | 1 |
| 243546177210-234 | Coloured touch up pen | dark oak | 1 |
| 243546182710-234 | Coloured touch up pen | golden oak | 1 |

KONIG Hard Wax Repair Kit

Product information

Repair kit for uPVC windows and laminate floors.



Contents

- x10 Hardwax PLUS, 8cm, Series Renolit Woodgrain
- x10 Hardwax PLUS, 8cm, Series Renolit Unidekore
- x1 Filler Planer, yellow
- x1 Brush-Fix Clearcoat, silk gloss
- x1 Brush-Fix Clearcoat, semi-gloss
- x1 melting device
- x1 Nonwoven abrasive coarse, approx. 10 x 6 cm
- x1 sanding fleece, fine, 55 x 75 mm

| Product code | Description | Packaging unit |
|--------------|-----------------|----------------|
| 0306690 | uPVC repair kit | 1 |

blaugelb U Packers

Product information

Spacer mounting clips used for leveling, exact alignment, and lining in window and door construction as well as in the interior and plastering of ceilings, walls, and floor structures.

Product advantages

- fast compensation with millimeter precision, quick assembly
- universal use, for leveling, straightening and underlaying
- anti-slip protection with fixing hook
- non-positive direct load suspension
- made of high-quality polypropylene, high resistance to other chemical products



| Product code | Description | Size (mm) | Width (mm) | Packaging unit |
|--------------|-------------|-----------|------------|----------------|
| 0416220 | U packer | 40 x 30 | 1 | 500 |
| 0416223 | U packer | 40 x 30 | 3 | 500 |
| 0416225 | U packer | 40 x 30 | 5 | 500 |
| 0416227 | U packer | 40 x 30 | 8 | 500 |
| 0416229 | U packer | 60 x 45 | 1 | 500 |
| 0416231 | U packer | 60 x 45 | 3 | 500 |
| 0416234 | U packer | 60 x 45 | 5 | 500 |
| 0416238 | U packer | 60 x 45 | 8 | 250 |

Transporter Blocks

Product information

Extruded polystyrene rigid foam that has high compressive strength, and reliably absorbs pressure loads. Protect sensitive surfaces and fragile goods against damage during transport.



| Product code | Description | Size (mm) | Packaging unit |
|--------------|--------------------|--------------|----------------|
| 0414504 | Transporter blocks | 48 x 48 x 10 | 100 |
| 0414524 | Transporter blocks | 48 x 48 x 15 | 100 |
| 0414525 | Transporter blocks | 48 x 48 x 20 | 100 |
| 0414526 | Transporter blocks | 48 x 48 x 30 | 100 |
| 0414529 | Transporter blocks | 48 x 48 x 50 | 100 |

Cosmofen Service Kit

Product information

Convenient kits for cleaning, care, protection and servicing of window and door profiles, and seals and mechanisms.



Cleaning & Care SERVICE SETS for windows and doors

KIT CONTAINS:

Cleansing Milk

Abrasive, solvent-free intensive cleanser for anodized aluminium windows, doors and roller shutters as well as for polyurethane windows and for all white PVC windows and roller shutters.

Gasket Care

For maintenance and servicing of the gaskets. Sustains the softness and prevents gaskets sticking on the profile in summer and freezing on the profile in winter.

Fitting Oil

For maintenance and servicing of the fittings and hinges. Sustains the required gliding properties of the moving parts, thus prevents the metals from grinding dry in combination with corroding/digging in. Also provides additional rust protection.

Cleaning Cloth

One cleaning cloth is included in the kit.



Maintenance of the fittings



Cleaning of surfaces



Maintenance of the gaskets

Product Code - W496010 (white) / W498004 (colour) - Technical Data

| | | |
|-------------------------------------|--|---|
| BASIS | 2-component polymerisation resin on acrylic basis | |
| COLOUR | of hardened up film | white approx. RAL9016 |
| FILM PROPERTY | of hardened up film | (similar to PVC-hard) hard impact resistance |
| MIXING RATIO | powder : paste in parts by weight | = 13:6g |
| VISCOSITY | at +20°C, immediately after the mixing | thixotrope |
| APPLICATION TIME | of the mini-set at +20°C (the application time is half as short at +30°C and twice as high at +10°C) | approx. 5 min |
| GRINDING RESISTANCE | at +20°C | after approx. 25 min |
| FINAL SETTING TIME | at +20°C, 50% rel. air humidity at ~90% Until functional hardness has been reached | approx. 120 min approx. 1d |
| MINIMUM TEMPERATURE FOR APPLICATION | | from +5°C |