
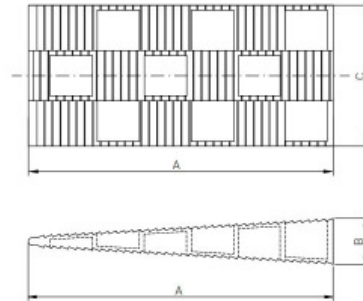


Fixing Wedges

Product information

Plastic wedges for adjustment and installation of windows and doors.

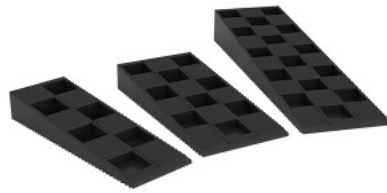

Product code	Description	Material	Packaging unit
72714290000	Fixing wedge - small	plastic	500
72720450000	Fixing wedge - large	plastic	200

KONIG Hard Wax Repair Kit

Product information

Repair kit for uPVC windows and laminate floors.



Contents

- x10 Hardwax PLUS, 8cm, Series Renolit Woodgrain
- x10 Hardwax PLUS, 8cm, Series Renolit Unidekore
- x1 Filler Planer, yellow
- x1 Brush-Fix Clearcoat, silk gloss
- x1 Brush-Fix Clearcoat, semi-gloss
- x1 melting device
- x1 Nonwoven abrasive coarse, approx. 10 x 6 cm
- x1 sanding fleece, fine, 55 x 75 mm

Product code	Description	Packaging unit
0306690	uPVC repair kit	1

blaugelb U Packers

Product information

Spacer mounting clips used for leveling, exact alignment, and lining in window and door construction as well as in the interior and plastering of ceilings, walls, and floor structures.

Product advantages

- fast compensation with millimeter precision, quick assembly
- universal use, for leveling, straightening and underlaying
- anti-slip protection with fixing hook
- non-positive direct load suspension
- made of high-quality polypropylene, high resistance to other chemical products




Product code	Description	Size (mm)	Width (mm)	Packaging unit
0416220	U packer	40 x 30	1	500
0416223	U packer	40 x 30	3	500
0416225	U packer	40 x 30	5	500
0416227	U packer	40 x 30	8	500
0416229	U packer	60 x 45	1	500
0416231	U packer	60 x 45	3	500
0416234	U packer	60 x 45	5	500
0416238	U packer	60 x 45	8	250

KONIG Touch-up Pens

Product information

Coloured touch-up pens for uPVC window profiles. (Top coat pen for colouring miter grooves on foil-laminated uPVC window profiles and doors. Recommended for indoor and outdoor use. Acrylic topcoat applies easily and touch dry in 5-10 mins, with 24 hrs curing.)

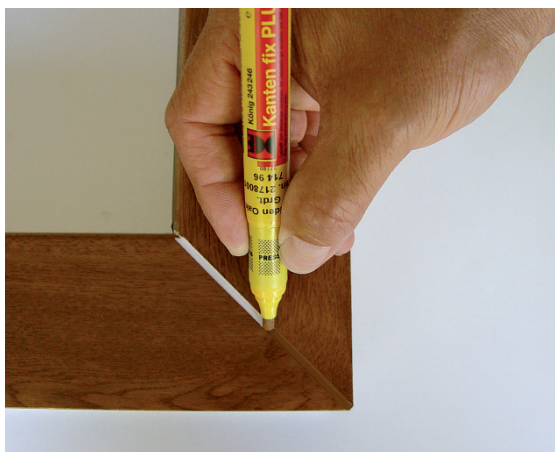

Product code	Description	Colour	Packaging unit
243546005018-164	Coloured touch up pen	turner oak	1
243556005118-164	Coloured touch up pen	sheffield oak	1
243546017117	Coloured touch up pen	jet black	1
243546070509	Coloured touch up pen	black/brown	1
243546070709	Coloured touch up pen	anthracite plus	1
243546075412-234	Coloured touch up pen	9016 white	1
243546093494-234	Coloured touch up pen	anthracite grey	1
243546111707-234	Coloured touch up pen	signal grey	1
243546147907-164	Coloured touch up pen	ceylon	1
243546157110-234	Coloured touch up pen	walnut	1
243546177210-234	Coloured touch up pen	dark oak	1
243546182710-234	Coloured touch up pen	golden oak	1

Cosmofen Service Kit

Product information

Convenient kits for cleaning, care, protection and servicing of window and door profiles, and seals and mechanisms.



Cleaning & Care SERVICE SETS for windows and doors

KIT CONTAINS:

Cleansing Milk

Abrasive, solvent-free intensive cleanser for anodized aluminium windows, doors and roller shutters as well as for polyurethane windows and for all white PVC windows and roller shutters.

Gasket Care

For maintenance and servicing of the gaskets. Sustains the softness and prevents gaskets sticking on the profile in summer and freezing on the profile in winter.

Fitting Oil

For maintenance and servicing of the fittings and hinges. Sustains the required gliding properties of the moving parts, thus prevents the metals from grinding dry in combination with corroding/digging in. Also provides additional rust protection.

Cleaning Cloth

One cleaning cloth is included in the kit.



Maintenance of the fittings



Cleaning of surfaces



Maintenance of the gaskets

Product Code - W496010 (white) / W498004 (colour) - Technical Data

BASIS	2-component polymerisation resin on acrylic basis	
COLOUR	of hardened up film	white approx. RAL9016
FILM PROPERTY	of hardened up film	(similar to PVC-hard) hard impact resistance
MIXING RATIO	powder : paste in parts by weight	= 13:6g
VISCOSITY	at +20°C, immediately after the mixing	thixotrope
APPLICATION TIME	of the mini-set at +20°C (the application time is half as short at +30°C and twice as high at +10°C)	approx. 5 min
GRINDING RESISTANCE	at +20°C	after approx. 25 min
FINAL SETTING TIME	at +20°C, 50% rel. air humidity at ~90% Until functional hardness has been reached	approx. 120 min approx. 1d
MINIMUM TEMPERATURE FOR APPLICATION		from +5°C