

## Ramsauer Sealing Adhesive 640

### Product information

640 Dicht Kleber sealing adhesive is suitable for gluing static and vibrating structures and components in car-body construction, container manufacturing and in boats, as well as for air conditioning systems and floor joints. 640 Dicht Kleber is a quickly curing neutral heavy-duty adhesive with high initial adhesive force. Highly weather resistant, does not contain any silicone, isocyanates or solvents, adheres to moist substrates, particularly suitable for gluing mirrors, suitable for application in clean rooms. Tested to provide burglar-resistant joints of resistance class ("WK") 2. Tested to EMICODE EC 1 - R very low emission. Fulfills the requirements of LEED and DGNB.



Product code	Description	Colour	Size (ml)	Packaging unit
4250302	Sealing adhesive 640	white	310	12

## Ramsauer Kraft Fix Power Adhesive 655

### Product information

655 Kraft Fix is a silicone and isocyanate-free power adhesive with a shore-A hardness of approx. 80. 655 Kraft Fix cures virtually without shrinking and without any odour. Thanks to its excellent adhesion to a wide variety of substrates it can be used for a vast field of applications. The product is suitable for window manufacturing, for securing the glass panes in timber and uPVC frames. Suitable for gluing mirrors. Fulfills the requirements of LEED and DGNB.



Product code	Description	Colour	Packaging unit
4290202	Kraft fix power adhesive 655	white	20
4290206	Kraft fix power adhesive 655	grey	20

## Soudal FIX ALL Crystal

### Product information

Fix ALL® Crystal: The perfect product if you are in search of a sealant-glyue with same strong properties as the Fix ALL® Classic and is also 100% transparent and paintable.



Product code	Description	Colour	Size (ml)	Packaging unit
122630	Polymer adhesive sealant	clear/transparent	290	12


## Ramsauer Marine Adhesive 540

### Product information

540 SEAL ADHESIVE is characterised by outstanding durability, vibration resistance, and elasticity over a wide temperature range. 540 SEAL ADHESIVE has excellent adhesion to moist substrates. Thanks to quick curing and high initial adhesive force, 540 SEAL ADHESIVE is suitable for preparing weather-resistant glue joints capable of bearing dynamic loads, in particular in the construction of boats, ships, yachts, and containers. Suitable for a wide variety of substrates, such as timber, metal, glass-reinforced plastic, a wide range of plastics, as well as mirrors.



Product code	Description	Colour	Size (ml)	Packaging unit
4253402	Marine Adhesive 540	white	310	20



## Ramsauer Pur Seal 522

### Product information

Ready to use polyurethane sealant used to create resilient and vibration resistant joints, suitable for indoor and outdoor use. Multi-purpose, providing good adhesion to timber, anodised aluminium, paint-coated metal, polyester, concrete etc, even without a previous primer coating.



Product code	Description	Colour	Size (ml)	Packaging unit
3230603	Pur seal marine 522	black	600	20

## Ramsauer PU Marine Bond 550

### Product information

Ready to use polyurethane adhesive and sealant with excellent adhesive properties and high mechanical strength. The joint sealing compound is tolerance compensating, vibration-reducing, resilient and non-corrosive, and suitable for dynamically loaded bonded and sealed joints. Multi-purpose, providing good adhesion to timber, paint-coated metal, polyester, concrete etc, even without a previous primer coating.



Product code	Description	Colour	Size (ml)	Packaging unit
4070603	Pur bond marine 550	black	600	20

## Ramsauer Adhesive 620

### Product information

620 Konstruktions Kleber Rapid construction adhesive is very fast, silicone-free and cures with air humidity or residual moisture (e.g. in timber) to form a highly resistant joint. Suitable for timber, metals, fire-resistant building slabs, containers, ventilation and air conditioning systems, etc. The adhesive can be covered with paint coats, can be ground, and it is waterproof.



Product code	Description	Colour	Size (ml)	Packaging unit
4050300	Construction adhesive 620	off white	310	20

## Corfix Duo Adhesive

### Product information

A two-component, polyurethane solvent-free adhesive designed for structural bonding of aluminum frame and sash corners. Can be used for pressure bonding of all kinds of insulating materials, gypsum board, FGK plates with steel, concrete.



Product code	Description	Colour	Size (gr)	Packaging unit
50411119000N	Adhesive	beige	900	10
50411119000SZ	Adhesive	grey	900	10

## Ramsauer 120 Silicone

### Product information

120 Neutral is particularly suitable for sealing insulating glass in timber frames with water dilutable paint systems, as well as for sealing connection joints. Adheres well without primer, compatible with paint coats, abrasion-free. Tested to DIN 18545, Part 2, Group E and EN ISO 11600, Class G25LM. In accordance with DIN 18540, Part 1. Fulfills the requirements of LEED and DGNB.




Product code	Description	Colour	Size (ml)	Packaging unit
1100301	Neutral crosslinking silicone	transparent	310	20
1100302	Neutral crosslinking silicone	white	310	20
1100303	Neutral crosslinking silicone	black	310	20
1100304	Neutral crosslinking silicone	dark brown	310	20
1100305	Neutral crosslinking silicone	bronze	310	20
1100306	Neutral crosslinking silicone	grey	310	20
1100308	Neutral crosslinking silicone	oak	310	20
1100390	Neutral crosslinking silicone	clay brown	310	20

## Ramsauer Natural Stone 440 Silicone

### Product information

NATURAL STONE 440 is a sealant specifically developed for jointing natural stone such as marble, granite, terrazzo, etc. An important advantage of this product over conventional silicone sealants is that contact with the mentioned building materials does not cause contamination of edge zones. NATURAL STONE 440 contains fungicidal and bactericidal agents and is also resistant to commercially available cleaners and disinfectants. NATURAL STONE 440 is suitable for use in joints exposed to high stress as well as for application in underwater structures. Tested to DIN EN ISO 846. Tested to ISO 16938-1 (test to determine staining of edge zones of natural stone by sealants used in joints). Suitable for use in food areas.

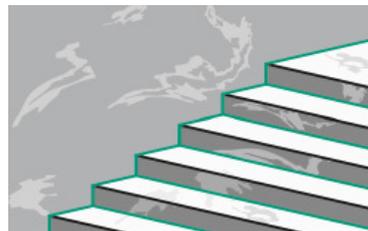

Product code	Description	Colour	Size (ml)	Packaging unit
1900301	Neutral crosslinking silicone	transparent	310	20
1900302	Neutral crosslinking silicone	white	310	20
1900303	Neutral crosslinking silicone	black	310	20
1900310	Neutral crosslinking silicone	bahama beige	310	20
1900319	Neutral crosslinking silicone	manhattan	310	20
1900321	Neutral crosslinking silicone	anthracite	310	20
1900325	Neutral crosslinking silicone	joint grey	310	20
1900328	Neutral crosslinking silicone	concrete grey	310	20
1900345	Neutral crosslinking silicone	pergamon	310	20

## Ramsauer 450 Silicone

### Product information

SANITARY 450 exhibits excellent adhesion to all materials that are commonly used in sanitary areas and facilities. This product contains fungicidal and bactericidal agents to prevent infestation by micro-organisms (mould fungi, bacteria). Great ease of application. SANITARY 450 is resistant to commercially available cleaning agents and disinfectants. More colours available on request. Tested to DIN EN ISO 846.



Product code	Description	Colour	Size (ml)	Packaging unit
2000301	Acidic crosslinking silicone	transparent	310	20
2000302	Acidic crosslinking silicone	white	310	20
2000310	Acidic crosslinking silicone	bahama beige	310	20
2000319	Acidic crosslinking silicone	joint grey	310	20
2000325	Acidic crosslinking silicone	manhattan	310	20
2000345	Acidic crosslinking silicone	pergamon	310	20
2001321	Acidic crosslinking silicone	anthracite	310	20
2002303	Acidic crosslinking silicone	black	310	20

## Ramsauer Primer 100

### Product information

For silicone and hybrid sealing compounds on plastics.



Product code	Description	Size (ml)	Packaging unit
9600310	Primer 100	300	1

## Ramsauer Primer 180

### Product information

Special primer for gluing natural stone using 655 Kraft Fix adhesive.



Product code	Description	Size (ml)	Packaging unit
9600118	Primer 180	300	1