



PRODUCT DATA SHEET

BUTYL Stretch Flex

To guarantee air and wind-tightness for the skin of a construction it must have the appropriate foils or panel materials providing a permanent seal at overlaps, gaps, joints and penetration points. BUTYL Dehnflex - Stretch Flex is used particularly as a seal at penetration points for wind seals, vapour barriers, roof underlays and OSB. Due to its great flexibility the tape can easily be positioned around the openings that require sealing and neatly pressed down. Its extremely good adhesive properties permit work on a variety of substrates mostly without a primer.

FIELD OF APPLICATION

- for trouble-free seals at penetration points such: rafters, outlet vents, electrical ducts

ADVANTAGES

- high elasticity
- a tape for all penetrations

AVAILABLE IN THE FOLLOWING DIMENSIONS

Roll width	50 mm	80 mm	100 mm
Roll length	10 m	10 m	10 m
Carton content	6 Rolls	4 Rolls	4 Rolls

PRODUCT DATA

Material composition	Highly flexible butyl rubber tape, adhesive on one side
Thickness	2 mm
Temperature resistance - Standard	-40 °C - 100 °C
Working temperature	5 °C - 40 °C
Expandability	300 %
Storage	2 years; cool and dry

BUTYL Stretch Flex

INFO

The materials used must be free from dust and grease and substrates must be dry and supporting.

The greater the pressure applied, the better the performance of the adhesive tape.

BUTYL Stretch Flex has the function of sealant and not of a strong connector. Optimum adhesion to the substrate is achieved in combination with BUBI LF Bonding Primer or UNI Primer.






(!)

Butyl and bitumen tapes have a high inherent weight. The tape must be mechanically secured in case of installation in projecting areas e.g. ceilings, cantilevers and soffit areas, where gravity acts directly on the tape.

CABLE PENETRATION

HOSE PENETRATION

PIPE PENETRATION

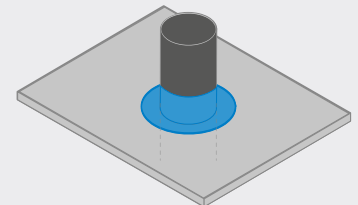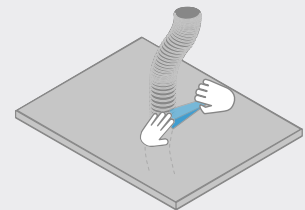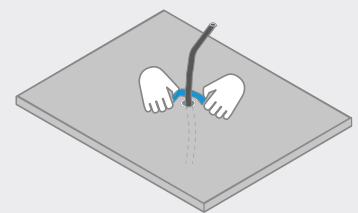

ISOCELL GmbH & Co KG

Gewerbestraße 9
5202 NEUMARKT AM WALLERSEE | Österreich
Tel.: +43 6216 4108 | Fax: +43 6216 7979
office@isocell.at

ISOCELL SCHWEIZ AG

Herbergstrasse 29
9524 ZUZWIL | Suisse /Schweiz
Tel.: +41 71 940 06 72
office@isocell.ch

ISOCELL FRANCE

170 Rue Jean Monnet | ZAC de Prat Pip Sud
29490 GUIPAVAS | France
Tél.: +33 2 98 42 11 00 | Fax: +33 2 98 42 11 99
contact@isocell-france.fr

ISOCELL BUREEL BELGIË

Außenborner Weg 1 | Schoppen
4770 AMEL | Belgique
Tel.: +32 80 39 90 58 | Fax: +32 80 39 97 68
office@isocell.be

ISOCELL Sverige AB

Köpsvängen 10
168 67 BROMMA | Sverige
Tel.: +46 10 130 25 00
info@isocell.se

ISOCELL
www.isocell.com